

# **New Construction Series**

High Performance, Low Maintenance

# **BUILT NORTH** IN THE **EAST** FOR THE NORTHEAST

Backed by 4 generations of our family – serving you since 1946.



100



Lower Energy Bills Low Ownership Cost
 Best-of-Class Warranty

- Low Air InfiltrationHigh-Tech UV ProtectionOutstanding Sound Reduction







#### Energy Star

All MasterView Windows exceed all ENERGY

Energy Star standards for windows and sliding doors.

#### AAMA Durability

Frames and components are built to the stringent specifications of the American Architectural

Manufacturers Association.

#### NFRC

America's leading window rating agency gives iation. NFRC National Fenestration Rating Council®

MasterView Windows their top rating for energy efficiency.



# The MasterView Windows Story

MasterView Windows are designed to live in harmony with your world. The high-efficiency design cuts energy costs dramatically. The low maintenance construction fits well with busy lifestyles. And with a best of class warranty, MasterView Windows are guaranteed to work beautifully for years.

# **Ecology. Economy.**

MasterView Windows offer the best of both worlds, with a durable, high-performance design that meets or exceeds all Energy Star standards.

## **Ultra-High Performance**

Our optional Energy Star U-4 and Energy Star III Glazing Packages meets or exceeds all current Energy Star standards. It can lower the average home energy bill by 30 to 40 percent and cut CO2 output by 1,600 pounds per year<sup>\*</sup>.

## Fabricated for today's generation.

MasterView New Construction Windows offer a wide array of styles and casings to accommodate almost any design. Exceptional fit and finish, along with outstanding thermal performance have made them a popular choice among quality

Our Windows are made in the Northeast for the Northeast backed by 4 generations of our family – serving you since 1946.

# MADE IN AMERICA

















asement

Door

Half Round

Bay / Bo

\* Courtesy Truseal Technologies


Double Hung

Specialty Shap

# What's between the Glass Makes all the Difference

### MASTERVIEW WINDOWS ARE BUILT WITH ADVANCED TECHNOLOGY DURALITE WARM-EDGE SPACERS

Windows built with Duralite technology reduce heat transfer and help stabilize the temperature of the inner windowpane, maintaining a comfortable inside environment, condensation-free glass, and saving you money on energy costs.



#### **DURALITE® SPACER DESIGN**

Duralite is a flexible, warm-edge spacer that lives between the inner and outer window panes. The Duralite technology features a unique no metal composite laminating system that provides superior durability and thermal performance for glass insulation in all weather.

A Masterview vinyl window with Duralite spacers contains an argon gas-filled polycarbonate shim with a virtually impermeable butyl sealant, a three-sided continuous moisture barrier, and a desiccated topcoat. This advanced design eliminates condensation and mold and allows natural light to filter in with UV blocking technology that protects interior finishes and decor.



#### SUPERIOR THERMAL PERFORMANCE

The thermal performance of a window plays a major role in household energy conservation. A high-performance window system will keep your energy costs low by reducing heat loss in the winter and heat gain in the summer. Duralite combined with Low-E glass and argon produces one of the highest performing, energy-efficient window systems, saving you money on your heating and cooling costs. Duralite is an ENERGY STAR<sup>®</sup> qualified product.



MASTERVIEW

WINDOW



Sol Enrol Construction materials

- Impact-resistant, scratch and dent-proof construction
- Resists pollution, acid rain, salt air, heat, humidity, temperature extremes, and weathering
- Lifetime guarantee and maintenance-free with easy cleaning functionality



- Heavy-duty double-walled frames provide ultimate structural strength
- Interlocking sash rails prevent tampering
- Dual-arm operators and multi-point locking systems for added security

# NOT ALL VINYL WINDOWS ARE **MASTERVIEW VINYL**

250 mL



- Patented DOE R5 glazing system provides superior insulation from weather and noise
- Unique multi-chamber construction eliminates the need for storm windows
- Meets Energy Star requirements, saving up to 40% in annual energy costs



- Clean architectural lines have a traditional window look
- → Peel-free color integrated into vinyl construction
- → Elevated curb appeal designed to last

OUR CUSTOM MANUFACTURING FORMULA COMBINES SUPERIOR PVC COMPOUNDS WITH INNOVATIVE ENERGY EFFICIENT TECHNOLOGIES TO PRODUCE A VINYL WINDOW THAT SURPASSES LEADING COMPETITORS IN QUALITY, COST-SAVINGS, AND VISUAL APPEAL.






# **Glazing Options**

# Not All Glass is Created Equal

Windows in the Northeast can take a beating - Get the Right Glass!!!

Cold and Mixed Climates Like the Northeast Demand Performance from their Windows!

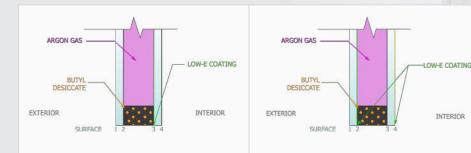

### **Energy Star III**

- Higher level of solar heat control for the Northern Region
- High visible light transmission of 68% for plenty of natural daylighting and visibility into interior spaces
- Lower level of indoor and exterior reflectance
- The Low-e coating on this surface keeps weather OUT of your home.
   Frigid winter air and summer heat stay outside where they belong!


### **Energy Star U4**

- Provides thermal insulation with passive solar gain resulting in year round cost savings
- High-level visible light transmission of 77% (VLT) for plenty of natural daylighting.
- Low-level indoor reflectivity
- Low e coatings on both glass surfaced keeps weather outside and your controlled environment in!

## Low E Coating Clear Glass Argon Fill High Performance Spacer System

### DOE – R5

- REDUCE THE AVERAGE HEAT LOSS THROUGH WINDOWS BY AS MUCH AS 40 PERCENT!
- \*Based on exterior replacement utilizing 16 windows. Savings are average and may vary according to home type and location.

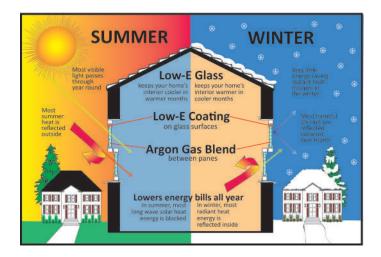

# **CLEAR INSULATED GLASS**

2 Pieces of insulated glass with air between them increases your energy efficiency from the standard One solid piece of glass.

Best for garages, sheds and other low cost applications



MASTERVIEW WINDOWS


## REDUCE THE AVERAGE HEAT LOSS THROUGH WINDOWS BY AS MUCH AS 40 PERCENT!

# The DOE R-5 Windows Volume Purchase Program is about more than just saving money

Cold and mixed climages like the Northeast demand performance from their windows! R 5 Windows are the top tier of energy efficient windows and are highly insulating!

The US Department of Energy's Building Technologies Program (BTP) is coordinating a volume purchase of R5 windows and low-e storm windows, to expand the market of these high efficiency products.

Price has been the principal barrier to more widespread market commercialization. The aim of this volume purchase initiative is to work with industry and potential buyers to make highly insulated windows more affordable.

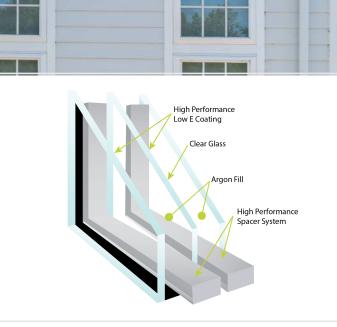

#### NFRC TESTING CHART DEPARTMENT OF ENERGY R5PROGRAM TRIPLE GLAZING PACKAGE

Effective Date: March 1, 2010

# 700/7000 Awning

		U-FACTOR	SHGC	VT	CR	DBLIOW Ey	GAS
SSB	WITHOUT GRIDS	0.20	0.19	0.35	75	У	DOUBLE AGON
SSB	WITH GRIDS	0.20	0.18	0.32	75	У	DOUBLE AGON
DSB	WITHOUT GRIDS	0.21	0.19	0.35	74	У	DOUBLE AGON
DSB	WITH GRIDS	0.22	0.18	0.32	74	Y	DOUBLE AGON

# 700/7000 Casement

		U-FACTOR	SHGC	VT	CR	DBLLOW Ey	GAS
SSB	WITHOUT GRIDS	0.20	0.19	0.35	74	У	DOUBLE AGON
SSB	WITH GRIDS	0.21	0.18	0.32	74	У	DOUBLE AGON
DSB	WITHOUT GRIDS	0.22	0.19	0.35	74	У	DOUBLE AGON
DSB	WITH GRIDS	0.22	0.18	0.32	74	Y	DOUBLE AGON

#### THE R FACTOR

indicates a windows resistance to Heat Flow (The higher the number the more effective the insulting factor).

#### THE U VALUE

measures the rate of heat transfer (The lower the U factor, the better a window insulates.)

KASSON AND KELLER, INC IS PROUD TO BE SELECTED AS A PARTICIPANT IN THE BTP VPP. WE PROVIDE A WIDE ARRAY OF PRODUCTS ACCEPTED UNDER THE DOE – R5 CRITERIA FOR WINDOWS.





3

**220 Series | Double Hung** *High thermal efficiency exceptionally solid design* 

MARCHAN T

# The standard window with all the superior features.

The 220 new construction series double hung comes standard with features superior over the ordinary new construction window- including thermal performance that will exceed Energy Star, choice of top and bottom sash ventilation , easy clean feature , peace of mind locking system. Fabricated for today's generation.

GLAZING	U-VALUE	SHGC	VLT	CR	ZONE
Energy Star U4	0.25	0.27	0.48	47	N,NNC
Energy Star III	0.29	0.37	0.51	59	NC
Low E w/ Argon	0.28	0.28	0.51	63	NC
High Perf. Low E	0.32	0.28	0.51	58	
Clear	0	0	0	-	

\*contact us to see thermal data with grids.

#### KAS-KEL WINDOWS WILL OFFER YOU A LIFETIME OF WORRY-FREE OPERATION, BACKED BY ONE OF THE BEST WARRANTIES IN THE INDUSTRY.







# 220 Rolling Window

Precision-calibrated rollers for long life and smooth fingertip operation

MATERIALS

PERF.

GLAZING

SCREENS

GRILLS

## 220 Rolling

The 220 Kas-Kel Rolling Windows are built on precision-calibrated rollers for smooth fingertip operation and manufactured to last for years. Maximize natural light filtration indoors with a beautifully designed rolling window.

#### NFRC Thermal Performance Data\*

MASTERVIEW WINDOWS

GLAZING	U-VALUE	SHGC	VLT	CR	ZONE
Energy Star U4	0.23	0.26	0.46	51	N,NC
Energy Star III	0.28	0.36	0.51	59	NC
Low E w/ Argon	0.27	0.28	0.51	63	N,NC
High Perf. Low E	0.31	0.28	0.51	59	
Clear	0	0	0	-	

\*contact us to see thermal data with grids.

#### KAS-KEL WINDOWS WILL OFFER YOU A LIFETIME OF WORRY-FREE OPERATION, BACKED BY ONE OF THE BEST WARRANTIES IN THE INDUSTRY.



Features	STANDARD	OPTION
High-grade PVC	<b></b>	
Fusion Welded Sash and Frame	<b></b>	
Sloped Sill and Interlock Leg	© ©	
Sash is easily removed for cleaning.	<b></b>	
Aluminum Reinforced Meeting Rail	<b>O</b>	
DP 35 Rating	<b></b>	
DP 40 Rating		<b>O</b>
DP 50 Rating		<b>O</b>
Energy Star III	<b>Ø</b>	
Energy Star U-4		<b>O</b>
Clear insulated glass		<b>O</b>
Duralite flexible, warm-edge spacers	<b></b>	
Tints, Heat Reflection and other options available		<b>O</b>
Aluminum Extruded Fiberglass 1/2 screen	<b></b>	
Aluminum framed fiberglass full screen		<b>O</b>
Full Flex Screens		<b>O</b>
Aluminum Screening Material		<b>O</b>
3/4" Contoured Grill Between the Glass		<b>O</b>
3/4" Contoured SDL with spacer bar		0





# 220 Picture

One of the most functional, most efficient vinyl picture windows on the planet

MATERIALS

PERF

GLAZING

GRILLS

CONSTRUCTION

The slim frame and sash design allow for maximum viewing area, while our Energy Star glazing package meets the latest, most rigorous Energy Star standards. It's one of the most functional, most efficient vinyl picture windows on the planet.

#### NFRC Thermal Performance Data\*

GLAZING	U-VALUE	SHGC	VLT
Energy Star U4	0.22	0.28	0.50
Low E w/ Argon	0.25	0.30	0.55
Energy Star III	0.26	0.39	0.55
High Perf. Low E	0.29	0.30	0.55
Clear	0.45	0.65	0.68

\*contact us to see thermal data with grids.

#### KAS-KEL WINDOWS WILL OFFER YOU A LIFETIME OF WORRY-FREE OPERATION, BACKED BY ONE OF THE BEST WARRANTIES IN THE INDUSTRY.



Fe	eatures	STANDARD	OPTION
High perfe	-grade PVC delivers exceptional strength and thermal ormance. White or beige Interior	<b>Ø</b>	
Fusio	on Welded Sash and Frame	<b>I</b>	
3 ¼″	Frame Depth	<b>I</b>	
DP 3	35 Rating	•	
Ener	gy Star III	<b>O</b>	
Ener	gy Star U-4		<b>I</b>
Clea	r insulated glass (3/4")		<b>I</b>
Dura	lite flexible, warm-edge spacers	<b>I</b>	
Tint: avail	s, Tempered and Double Strength and other options able		<b>I</b>
3/4"	Contoured Grill Between the Glass		<b>I</b>
3/4"	Contoured SDL with spacer bar		<b>I</b>
Integ	gral Nail Fin	<b>S</b>	
Integ	gral Nail Fin and J-Channel	<b>I</b>	
Avail	able without J-Channel		<b>I</b>
4 9/1	6" , 6 9/16", and custom Pre-Primed Extension Jamb		<b>I</b>



# **300C Series | Double Hung** *High thermal efficiency exceptionally solid design*

MATERIALS

PERF.

GLAZING

SCREENS

CONSTRUCTION

HARDWARE

GRILLS

MASTERVIEW WINDOWS

The 300C Double Hung window utilizes a New England Style 3 <sup>1</sup>/<sub>2</sub>" Cambridge Flat Casing which integrates a built -in J-channel pocket for siding and nail-fin for installation. (filler available). An elegant, classic look and advanced design with high thermal ratings and glazing package options that meet or exceed Energy Star requirements. Factory applied off the edge design ensures maximum weather protection.

GLAZING	U-VALUE	SHGC	VLT	CR	ZONE
Energy Star U4	0.25	0.27	0.48	47	N,NNC
Energy Star III	0.29	0.37	0.51	59	NC
High Perf. Low E	0.32	0.28	0.51	58	NC
Low E w/ Argon	0.28	0.28	0.51	63	
Clear	0	0	0	-	

\*contact us to see thermal data with grids.

#### KAS-KEL WINDOWS WILL OFFER YOU A LIFETIME OF WORRY-FREE OPERATION, BACKED BY ONE OF THE BEST WARRANTIES IN THE INDUSTRY.



For atoms of the or Bege Interior       Statubar       Ortion         High grade PVC delivers exceptional strength and thermal				
High-grade PVC delivers exceptional strength and thermal       Image: Comparison of the strength and thermal         Full Fusion Welded Sash and Frame       Image: Comparison of the strength and thermal         Sloped Sill and Interlock Leg       Image: Comparison of the strength and thermal         J-1/4* Frame Depth       Image: Comparison of the strength and thermal         DP 40 Rating       Image: Comparison of the strength and thermal         DP 50 Rating       Image: Comparison of the strength and thermal         Energy Star U-4       Image: Comparison of the strength and thermal         Clear insulated glass       Image: Comparison of the strength and thermal         Duralite flexible, warm-edge spacers       Image: Comparison of the strength and thermal         Extruded aluminum framed fiberglass full screen       Image: Comparison on painted exterior frames         Full Flex Screens on painted exterior frames       Image: Comparison of the strength and the strength and thermal         Double weather stripped Meeting Rail       Image: Comparison of the strength and the		Features E	STANDARD	OPTION
performance. White or Beige Interior       Image: Composite Compos				
Sloped Sill and Interlock Leg       Image: Sloped Sill and Interlock Leg         3-1/4* Frame Depth       Image: Sloped Sill and Interlock Leg         DP 40 Rating       Image: Sloped Sill and Interlock Leg         DP 50 Rating       Image: Sloped Sill and Interlock Leg         Energy Star U4       Image: Sloped Sill and Interlock Leg         Energy Star U4       Image: Sloped Sill and Interlock Leg         Clear insulated glass       Image: Sloped Sill and Interlock Inte		performance. White or Beige Interior		
3-1/4* Frame Depth       Image: Constraint of the second sec				
DP 50 Rating       Image: Constraint of the second se			0	
DP 50 Rating       Image: Constraint of the second se		DP 40 Rating	0	
Energy Star U-4       Image: Control of Control		-		
Energy Star U-4       Image: Control of Control		Energy Star III (recommended)		
Clear insulated glass       Image: Clear insulated glass         Duralite flexible, warm-edge spacers       Image: Clear insulated glass         Tints, Heat Reflection and other options available       Image: Clear insulated glass         Extruded aluminum framed fiberglass full screen       Image: Clear insulated glass         Extruded aluminum framed fiberglass full screen       Image: Clear insulated glass         Extruded aluminum framed locking 1/2 Screen       Image: Clear insulated glass         Full Flex Screens on painted exterior frames       Image: Clear insulated glass         Aluminum Screening Material       Image: Clear insulated glass         Composite Reinforced Meeting Rail       Image: Clear insulated glass         Double weather stripped Meeting Rail       Image: Clear insulated glass         Double weather stripped Meeting Rail       Image: Clear insulated glass         Nailing fin with J Channel       Image: Clear insulated glass         Nail Fin Only       Image: Clear insulated glass         Egress Sizing Available       Image: Clear insulated glass         Primed Solid Pine Applied Extension Jambs 4-9/16", Image: Clear insulated glass       Image: Clear insulated glass         All windows over 23 1/2 inches have 2 sash locks       Image: Clear insulated glass         Image: Vigit Latches       Image: Clear insulated glass         WOCD sash limiters       Image: Cl				
Tints, Heat Reflection and other options available <ul> <li>Extruded aluminum framed fiberglass full screen</li> <li>Extruded aluminum framed locking 1/2 Screen</li> <li>Extruded aluminum framed locking 1/2 Screen</li> <li>Full Flex Screens on painted exterior frames</li> <li>Aluminum Screening Material</li> <li>Composite Reinforced Meeting Rail</li> <li>Sashes are easily removed for cleaning</li> <li>Composite Reinforced Meeting Rail</li> <li>Sashes are easily removed for cleaning</li> <li>Double weather stripped Meeting Rail</li> <li>3 ½" Cambridge Casing</li> <li>Nailing fin with J Channel</li> <li>Nailing fin with J Channel</li> <li>Primed Solid Pine Applied Extension Jambs 4-9/16",</li> <li>Gerss Sizing Available</li> <li>Sheet Rock Returns</li> <li>Sheet Rock Returns</li> <li>Wight Latches</li> <li>WOCD sash limiters</li> <li>S/8" Contoured Grill Between the Glass</li> </ul>				0
Extruded aluminum framed fiberglass full screen       Image: Composite Reinforced Neterior frames         Full Flex Screens on painted exterior frames       Image: Composite Reinforced Meeting Rail         Composite Reinforced Meeting Rail       Image: Composite Reinforced Meeting Rail         Sashes are easily removed for cleaning       Image: Composite Reinforced Meeting Rail         Double weather stripped Meeting Rail       Image: Composite Reinforced Meeting Rail         Sashes are easily removed for cleaning       Image: Composite Reinforced Meeting Rail         Nalling fin with J Channel       Image: Composite Reinforced Meeting Rail         Nailing fin with J Channel       Image: Composite Reinforced Meeting Rail         Nailing fin with J Channel       Image: Composite Reinforced Meeting Rail         Nailing fin with J Channel       Image: Composite Reinforced Meeting Rail         Nailing fin with J Channel       Image: Composite Reinforced Meeting Rail         Nailing fin with J Channel       Image: Composite Reinforced Meeting Rail         Sheet Rock Returns       Image: Composite Reinforced Composite Reinforced Reinf	,	Duralite flexible, warm-edge spacers	<b></b>	
Extruded aluminum framed locking 1/2 Screen <ul> <li>Full Flex Screens on painted exterior frames</li> <li>Aluminum Screening Material</li> <li>Composite Reinforced Meeting Rail</li> <li>Composite Reinforced Meeting Rail</li> <li>Sashes are easily removed for cleaning</li> <li>Double weather stripped Meeting Rail</li> <li>O</li> </ul> <li>3 ½" Cambridge Casing</li> <li>Nail fin with J Channel</li> <li>Nail Fin Only</li> <li>Egress Sizing Available</li> <li>Primed Solid Pine Applied Extension Jambs 4-9/16",</li> <li>Germany and Custom</li> <li>All windows over 23 1/2 inches have 2 sash locks for maximum protection</li> <li>Night Latches</li> <li>WOCD sash limiters</li> <li>Sole Contoured Grill Between the Glass</li>		Tints, Heat Reflection and other options available		<b></b>
Full Flex Screens on painted exterior frames       Image: Composite Reinforced Meeting Rail         Aluminum Screening Material       Image: Composite Reinforced Meeting Rail         Sashes are easily removed for cleaning       Image: Composite Reinforced Meeting Rail         Double weather stripped Meeting Rail       Image: Composite Reinforced Meeting Rail         3 ½" Cambridge Casing       Image: Composite Reinforced Meeting Rail         Nailing fin with J Channel       Image: Composite Reinforced Meeting Rail         Nail Fin Only       Image: Composite Reinforced Meeting Rail         Fegress Sizing Available       Image: Composite Reinforced Meeting Rail         Primed Solid Pine Applied Extension Jambs 4-9/16",       Image: Composite Reinforced Reitons         Sheet Rock Returns       Image: Composite Reinforced Reitons         All windows over 23 1/2 inches have 2 sash locks for maximum protection       Image: Composite Reinforced		Extruded aluminum framed fiberglass full screen	<b>Ø</b>	
Auminum Screening Material       Image: Composite Reinforced Meeting Rail         Composite Reinforced Meeting Rail       Image: Composite Reinforced Meeting Rail         Sashes are easily removed for cleaning       Image: Composite Reinforced Meeting Rail         Double weather stripped Meeting Rail       Image: Composite Reinforced Meeting Rail         3 ½" Cambridge Casing       Image: Composite Reinforced Meeting Rail         Nailing fin with J Channel       Image: Composite Reinforced Meeting Rail         Nail Fin Only       Image: Composite Reinforced Meeting Rail         Egress Sizing Available       Image: Composite Reinforced Meeting Rail         Primed Solid Pine Applied Extension Jambs 4-9/16", 6-9/16" and Custom       Image: Composite Reinforced R		Extruded aluminum framed locking 1/2 Screen		<b>I</b>
Composite Reinforced Meeting Rail       Image: Composite Reinforced Meeting Rail         Sashes are easily removed for cleaning       Image: Composite Reinforced Meeting Rail         Double weather stripped Meeting Rail       Image: Composite Reinforced Meeting Rail         3 ½" Cambridge Casing       Image: Composite Reinforced Meeting Rail         Nailing fin with J Channel       Image: Composite Reinforced Meeting Rail         Nail Fin Only       Image: Composite Reinforced Meeting Rail         Egress Sizing Available       Image: Composite Reinforced Meeting Rail         Primed Solid Pine Applied Extension Jambs 4-9/16", G-9/16" and Custom       Image: Composite Reinforced Meeting Rail         Sheet Rock Returns       Image: Composite Reinforced Reinforced Reinforced Reinforced Reinforced In white or beige to seamlessly match your window frame       Image: Composite Reinforced ReinforcedReinforcedReinforcedReinforcedReinforcedReinforcedReinforcedReinf		Full Flex Screens on painted exterior frames		<b>I</b>
Sashes are easily removed for cleaning       Image: Construction of the cleaning         Double weather stripped Meeting Rail       Image: Construction of the cleaning         3 ½" Cambridge Casing       Image: Construction of the cleaning         Nailing fin with J Channel       Image: Construction of the cleaning         Nail Fin Only       Image: Construction of the cleaning         Egress Sizing Available       Image: Construction of the cleaning of the cleaning         Primed Solid Pine Applied Extension Jambs 4-9/16",       Image: Construction of the cleaning of the c		Aluminum Screening Material		<b>I</b>
Double weather stripped Meeting Rail       Image: Casing         3 ½" Cambridge Casing       Image: Casing         Nailing fin with J Channel       Image: Casing         Nail Fin Only       Image: Casing         Egress Sizing Available       Image: Casing         Primed Solid Pine Applied Extension Jambs 4-9/16",       Image: Casing         Sheet Rock Returns       Image: Casing         All windows over 23 1/2 inches have 2 sash locks for maximum protection       Image: Casing Casin		Composite Reinforced Meeting Rail	<b>O</b>	
3 ½" Cambridge Casing       Image: Casing         Nailing fin with J Channel       Image: Casing         Nail Fin Only       Image: Casing         Egress Sizing Available       Image: Casing         Primed Solid Pine Applied Extension Jambs 4-9/16",       Image: Casing         6-9/16" and Custom       Image: Casing         Sheet Rock Returns       Image: Casing         All windows over 23 1/2 inches have 2 sash locks       Image: Casing         for maximum protection       Image: Casing         Produced in white or beige to seamlessly match your       Image: Casing         Night Latches       Image: Casing         WOCD sash limiters       Image: Casing         5/8" Contoured Grill Between the Glass       Image: Casing		Sashes are easily removed for cleaning	0	
Nailing fin with J Channel       Image: Constraint of the second se		Double weather stripped Meeting Rail	<b>O</b>	
Nail Fin Only       Image: Constraint of the second s		3 ½" Cambridge Casing	<b>O</b>	
Egress Sizing Available       Image: Comparison of the applied Extension Jambs 4-9/16", 6-9/16" and Custom         Primed Solid Pine Applied Extension Jambs 4-9/16", 6-9/16" and Custom       Image: Comparison of the applied Extension Jambs 4-9/16", 6-9/16", 6-9/16" and Custom         Sheet Rock Returns       Image: Comparison of the applied Extension Jambs 4-9/16", 6-9/16", 6-9/16" and Custom       Image: Comparison of the applied Extension Jambs 4-9/16", 6-9/16", 6-9/16" and Custom         All windows over 23 1/2 inches have 2 sash locks for maximum protection       Image: Comparison of the applied Extension Jambs 4-9/16", 6-9/16",		Nailing fin with J Channel	<b>O</b>	
6-9/16" and Custom       Image: Custom Custom Custom         Sheet Rock Returns       Image: Custom Cu		Nail Fin Only		<b>I</b>
6-9/16" and Custom       Image: Custom Custom Custom         Sheet Rock Returns       Image: Custom Cu	,	Egress Sizing Available		<b>I</b>
All windows over 23 1/2 inches have 2 sash locks for maximum protection       Image: Constraint of the second		Primed Solid Pine Applied Extension Jambs 4-9/16", 6-9/16" and Custom		<b>Ø</b>
for maximum protection     Image: Constraint of the constr		Sheet Rock Returns		<b>Ø</b>
window frame     Image: Constraint of the second seco			<b>I</b>	
WOCD sash limiters       5/8" Contoured Grill Between the Glass			0	
5/8" Contoured Grill Between the Glass		Night Latches	<b></b>	
		WOCD sash limiters		<b>I</b>
3/4" Contoured SDL with spacer bar		5/8" Contoured Grill Between the Glass		<b></b>
		3/4" Contoured SDL with spacer bar		<b>I</b>

Kas-Kel 🛃



# **300C Rolling Window** *Our Most Popular Rolling WIndow - In Cambridge Casing*

The 300C Rolling window utilizes a New England Style 3 <sup>1</sup>/<sub>2</sub>" Cambridge Flat Casing which integrates a built -in J-channel pocket for siding and nail-fin for installation. (filler available). An elegant, classic look and advanced design with high thermal ratings and glazing package options that meet or exceed Energy Star requirements.

#### NFRC Thermal Performance Data\*

GLAZING	U-VALUE	SHGC	VLT	CR	ZONE
Energy Star U4	0.23	0.26	0.46	51	N,NC
Energy Star III	0.28	0.36	0.51	59	NC
Low E w/ Argon	0.27	0.28	0.51	63	N,NC
High Perf. Low E	0.31	0.28	0.51	59	
Clear	0	0	0	-	

\*contact us to see thermal data with grids.

#### KAS-KEL WINDOWS WILL OFFER YOU A LIFETIME OF WORRY-FREE OPERATION, BACKED BY ONE OF THE BEST WARRANTIES IN THE INDUSTRY.

	Features	STANDARD	OPTION
MATERIALS	High-grade PVC	<b>O</b>	
	Fusion Welded Sash and Frame	<b></b>	
	Sloped Sill and Interlock Leg	<b>I</b>	
ААТЕ	3 ½" Cambridge Casing	© © © ©	
2	Sash is easily removed for cleaning.	<b>I</b>	
	Aluminum Reinforced Meeting Rail	<b>O</b>	
	DP 35 Rating	<b>O</b>	
PERF.	DP 40 Rating		<b></b>
	DP 50 Rating		0
	Energy Star III	<b>O</b>	
g	Energy Star U-4		<b></b>
GLAZING	Clear insulated glass		<b>O</b>
U	Duralite flexible, warm-edge spacers	<b>I</b>	
	Tints, Heat Reflection and other options available		0
	Aluminum Extruded Fiberglass 1/2 screen	<b>I</b>	
SCREENS	Aluminum framed fiberglass full screen		<b>O</b>
SCRI	Full Flex Screens		<b>I</b>
	Aluminum Screening Material		<ul><li>⊘</li><li></li></ul>
LLS	3/4" Contoured Grill Between the Glass		<b>I</b>
GRILLS	3/4" Contoured SDL with spacer bar		<b>O</b>







# **300C Picture Window**

Our most popular vinyl new construction window with Cambridge Flat Casing.

MATERIALS

PERF

GLAZING

GRILLS

CONSTRUCTION

The 300C Picture window utilizes a New England Style 3 1/2" Cambridge Flat Casing which integrates a built -in J-channel pocket for siding and nail-fin for installation. (filler available). An elegant, classic look and advanced design with high thermal ratings and glazing package options that meet or exceed Energy Star requirements. Factory applied off the edge design ensures maximum weather protection.

#### NFRC Thermal Performance Data\*

MASTERVIEW

WINDOWS

RV KAS KEI

	U-VALUE	SHGC	VLT
Energy Star U4	0.22	0.28	0.50
Low E w/ Argon	0.25	0.30	0.55
Energy Star III	0.26	0.39	0.55
High Perf. Low E	0.29	0.30	0.55
Clear	0.45	0.65	0.68

\*contact us to see thermal data with grids.



Features	STANDARD	OPTION
High-grade PVC delivers exceptional strength and thermal performance. White or beige Interior	<b>O</b>	
Fusion Welded Sash and Frame	<b>O</b>	
Cambridge Flat Casing	<b></b>	
3-5/8" Frame Depth	<b>O</b>	
DP 50 Rating	<b>Ø</b>	
Energy Star III	<b>O</b>	
Energy Star U-4		<b>I</b>
Clear insulated glass (3/4")		<ul><li>⊘</li><li></li></ul>
Duralite flexible, warm-edge spacers		<b>O</b>
Tints, Tempered and Double Strength and other options available		0
3/4" Contoured Grill Between the Glass		<b>I</b>
3/4" Contoured SDL with spacer bar		0
Integral Nail Fin	<b>O</b>	
Integral Nail Fin and J-Channel	<b>I</b>	
Available without J-Channel		<b>I</b>
4 9/16" , 6 9/16", and custom Pre-Primed Extension Jamb		<b>I</b>

- C to a the marked I - Che marked which and a

KAS-KEL WINDOWS OFFER YOU A LIFETIME OF WORRY-FREE OPERATION, BACKED BY ONE OF THE BEST WARRANTIES IN THE INDUSTRY.







# **300 Double Hung** For a clean look and easy installation

# **Traditional Look**

The 300 Double Hung window utilizes an integrated **brickmold trim** package or a 3 ½" vinyl trim option, both of which also serve as a J-channel pocket for easy installation. An elegant, classic look and advanced design with high thermal ratings and glazing package options that meet or exceed Energy Star requirements.

GLAZING	U-VALUE	SHGC	VLT		
Energy Star U4	0.23	0.27	0.48	51	N,NC
Energy Star III	0.27	0.37	0.52	51	NC
Low E w/ Argon	0.27	0.28	0.52	63	NC
High Perf. Low E	0.31	0.28	0.52	63	
Clear	0	0	0	-	

\*contact us to see thermal data with grids.

#### KAS-KEL WINDOWS WILL OFFER YOU A LIFETIME OF WORRY-FREE OPERATION, BACKED BY ONE OF THE BEST WARRANTIES IN THE INDUSTRY.



#### Features STANDARD OPTION High-grade PVC delivers exceptional strength and thermal performance. White or beige Interior Fusion Welded Sash and Frame Sloped Sill with Interlocking Leg 3-5/8" Frame Depth DP 35 Rating DP 50 Rating Energy Star III Energy Star U-4 Glass Double Strength Glass Clear insulated glass Duralite flexible, warm-edge spacers Tints, Heat Reflection and other options available Aluminum framed fiberglass full screen Aluminum framed fiberglass half screen Full Flex Screen on painted products Aluminum Screening Material All windows over 23 1/2 inches have 2 sash locks for maximum protection Night Latches WOCD sash limiters Produced in white or beige to seamlessly match your window frame Brickmold exterior profile Composite Reinforced Meeting Rail Nailing fin with J Channel Double weather stripped Meeting Rail J Channel Filler Bottom and Top Sash Tilt in for easy cleaning Primed Solid Pine Applied Extension Jambs 4-9/16", 6-9/16" and Custom 3/4" Contoured Grill Between the Glass



3/4" Contoured SDL with spacer bar

MATERIALS

PERF

GLAZING

SCREENS

HARDWARE

CONSTRUCTION

GRILLS

Kas-Kel 🍢



# **300 Rolling Window** *Creates a traditional exterior finish*

# Creates a traditional exterior finish

MATERIALS

PERF

GLAZING

SCREENS

CONSTRUCTION

GRILLS

HARDWARE

Kas-Kel's 300 series new construction rolling windows feature an integrated brickmold trim package, which creates a traditional exterior finish.

The brickmold trim also serves as a J-channel pocket making for a clean finish look and easy installation.

#### NFRC Thermal Performance Data\*

GLAZING	U-VALUE	SHGC	VLT	CR	ZONE
Energy Star U4	0.25	0.27	0.47	47	N,NC
Energy Star III	0.29	0.37	0.52	59	NC
Low E w/ Argon	0.29	0.29	0.52	59	NC
High Perf. Low E	0.33	0.29	0.52	56	
Clear	0	0	0	-	

\*contact us to see thermal data with grids.

#### KAS-KEL WINDOWS WILL OFFER YOU A LIFETIME OF WORRY-FREE OPERATION, BACKED BY ONE OF THE BEST WARRANTIES IN THE INDUSTRY.



Features	STANDARD	OPTION
High-grade PVC delivers exceptional strength and thermal performance. White or beige Interior	0	
Fusion Welded Sash and Frame	<b></b>	
Removable Sash for cleaning	<b>O</b>	
Fully Weather Stripped Interlock	<b></b>	
Frame Depth 3 5/8"	<b>O</b>	
DP 35 Rating	<b>O</b>	
DP 40 Rating		<b>Ø</b>
Energy Star III	<b>O</b>	
Energy Star U-4		<b>O</b>
Clear insulated glass		<b>O</b>
Duralite flexible, warm-edge spacers	<b>I</b>	
Tints, Heat Reflection and other options available		<b>O</b>
Aluminum Extruded Fiberglass 1/2 screen	<b>Ø</b>	
Aluminum framed fiberglass full screen		<b>O</b>
Full Flexscreens on painted exteriors		<b>O</b>
Aluminum Screening Material		<b>O</b>
Composite Reinforced Meeting Rail	<b>O</b>	
Integral Nail Fin	<b></b>	
Integral Nail Fin and J-Channel	<b>O</b>	
4 9/16" , 6 9/16", and custom Pre-Primed Extension Jamb		<b>O</b>
3/4" Contoured Grill Between the Glass		<b>I</b>
3/4" Contoured SDL with spacer bar		<b>I</b>
Masterview Rolling Windows are built on precision-calibrated rollers for long life and smooth fingertip operation.	0	
Cam Locks made to stand up to frequent use.	<b></b>	
All windows over 28 inches tall have 2 sash locks for maximum protection	<b>O</b>	
Produced in white or beige to seamlessly match your window frame	<b>O</b>	





MATERIALS

PERF.

GLAZING

CONSTRUCTION

GRILLS

# Clean finish look and easy installation

MASTERVIEW WINDOWS

Kas-Kel's 300 series new construction picture windows feature an integrated brickmold trim package, which creates a traditional exterior finish. The brickmold trim also serves as a J-channel pocket making for a clean finish look and easy installation.

#### NFRC Thermal Performance Data\*

GLAZING	U-VALUE	SHGC	VLT	CR	
Energy Star U4	0	0	0		
Energy Star III	0.25	0.40	0.57	65	
Low E w/ Argon	0.25	0.31	0.57	65	
High Perf. Low E	0.29	0.31	0.57	60	
Clear Clear-Air-Clear	0.46	0.68	0.45	45	

\*contact us to see thermal data with grids.

#### KAS-KEL WINDOWS WILL OFFER YOU A LIFETIME OF WORRY-FREE OPERATION, BACKED BY ONE OF THE BEST WARRANTIES IN THE INDUSTRY.

Features	STANDARD	OPTION
High-grade PVC delivers exceptional strength and thermal performance. White or beige Interior	<b>I</b>	
Fusion Welded Sash and Frame	<b>I</b>	
Frame Depth 3 5/8"	<b>O</b>	
DP 50 Rating		<b>O</b>
Energy Star III	<b>O</b>	
Energy Star U-4		<b>O</b>
Clear insulated glass		<b>O</b>
Duralite flexible, warm-edge spacers	<b>O</b>	
Tints, Heat Reflection and other options available		0
Integral Nail Fin	<b>I</b>	
Integral Nail Fin and J-Channel	<b>Ø</b>	
4 9/16" , 6 9/16", and custom Pre-Primed Extension Jamb		<b>S</b>
3/4" Contoured Grill Between the Glass		<b>I</b>
3/4" Contoured SDL with spacer bar		<b>I</b>







# 700 SERIES | Casement engineered for easy operation and maximum ventilation

# **Our Most Versatile Window**

By design this window combines the beauty and performance you would expect to find in premium windows. Multiple point locking system with a clean fold away handle speaks volumes about our Casements. Configured with single or multi-unit combination for maximum ventilation. Fabricated for today's generation.

GLAZING	U-VALUE	SHGC	VLT
DOE – R5 – Triple	0.19	0.19	0.33
Energy Star U-4	0.23	0.23	0.41
Energy Star III	0.26	0.32	0.44
Low E Argon	0.26	0.24	0.44
Low E HP	0.29	0.24	0.44
Clear	0.41	0.53	0.54

\*contact us to see thermal data with grids.

#### **KAS-KEL WINDOWS WILL OFFER YOU A LIFETIME OF WORRY-FREE OPERATION, BACKED BY ONE OF THE BEST** WARRANTIES IN THE INDUSTRY.





	Features	STANDARD	OPTION
	High-grade PVC delivers exceptional strength and thermal performance. White or Beige Interior	<b>O</b>	
S	Fusion Welded Sash and Frame		
MATERIALS	Exterior Beveled Sash	<b></b>	
	Sash Snubbers	<b></b>	
	Double weather stripped Sash	<b>O</b>	
	Single Lever Multi-Point Locking System	<b>O</b>	
PERF.	DP 50 Rating	<b>I</b>	
	Energy Star III (recommended)		<b></b>
	Energy Star U-4		<b></b>
DNI	DOE R5 Triple Glass Package		<b>I</b>
GLAZING	Clear insulated glass		<b>I</b>
	Duralite flexible, warm-edge spacers	<b></b>	
	Tints, Heat Reflection, Impact Resistance, Triple Glazing and other options available		<b>I</b>
ENS	Aluminum Extruded Full View Fiberglass Full Screen	<b>I</b>	
SCREENS	Aluminum Screening Material		<b>I</b>
RE	Folding Hardware		<b>I</b>
HARDWARE	Egress Hardware		<b>I</b>
HAI	Sash Limiter Hardware (for Fall Prevention)		<b>I</b>
	Nailing fin with J Channel	<b>Ø</b>	
TION	Brickmold J Channel/ or no J Channel		<b>I</b>
TRUC	3" Cambridge Casing		0
CONSTRUCTION	Primed Applied Solid Pine Extension Jambs 4-9/16, 6-9/16 and Custom		<b>I</b>
	1/2" and 3/4" Sheetrock Returns		<b>I</b>
	3/4" Contoured Grill Between the Glass		© © © ©
GRILLS	3/4" Contoured SDL with spacer bar		<b>I</b>
0	2" Contoured SDL with spacer bar for simulated Double Hung look		<b>O</b>

MasterView Window Systems, a quality product of Kasson and Keller Inc | 60 School Street, Fonda, NY 12068





# 700 Series | Awning window

Easy operation and maximum ventilation

# The accent window with all the bells and whistles.

The unique style and lines will catch your eye as will the performance and sizing features it includes. Stacked side by side or over the top of a primary window will work with great ease , giving you the flexibility needed when designing your home. Designed for today's generation.

GLAZING	U-VALUE	SHGC	VLT
DOE – R5 – Triple	0.19	0.19	0.33
Energy Star U-4	0.23	0.23	0.41
Energy Star III	0.26	0.32	0.44
Low E Argon	0.26	0.24	0.44
Low E HP	0.29	0.24	0.44
Clear	0.41	0.53	0.54

\*contact us to see thermal data with grids.

#### KAS-KEL WINDOWS WILL OFFER YOU A LIFETIME OF WORRY-FREE OPERATION, BACKED BY ONE OF THE BEST WARRANTIES IN THE INDUSTRY.

	Features	STANDARD	OPTION
MATERIALS	High-grade PVC delivers exceptional strength and thermal performance. White or Beige Interior	0	
	Fusion Welded Sash and Frame	<b></b>	
	Beveled Exterior Sash	<b></b>	
	Sash Snubbers	<b></b>	
	Energy Star III (recommended)		<b></b>
	Energy Star U-4		<b></b>
DNI	DOE R5 Triple Glass Package		<ul><li>✓</li><li>✓</li></ul>
GLAZING	Clear insulated glass		<b>Ø</b>
•	Duralite flexible, warm-edge spacers	<b></b>	
	Impact Resistance, Tints, Heat Reflection, and other options available		<b>I</b>
PERF.	DP 50 Rating	<b>I</b>	
RE	Produced in white or beige to seamlessly match your window frame	<b>O</b>	
HARDWARE	Single Lever Multi-Point Locking System	<b></b>	
H	Folding Hardware		<b>I</b>
	Double weather stripped Sash	<b></b>	
NOI	1/2" and 3/4" Sheetrock Returns		<b></b>
CONSTRUCTION	Nailing fin with J Channel		<ul> <li></li> <li></li></ul>
CONS	Brickmold J Channel/ or no J Channel		<b></b>
	Primed Solid Pine Applied Extension Jambs 4-9/16", 6-9/16" and Custom		<b>I</b>
ENS	Extruded aluminum framed fiberglass full screen	<b></b>	
SCREENS	Aluminum Screening Material		<b>I</b>
	3/4" Contoured Grill Between the Glass		<b>O</b>
GRILLS	3/4" Contoured SDL with spacer bar		0
	2" Contoured SDL with spacer bar for simulated Double Hung look		0







# Expansive views and versatile style.

Available in your choice of glass options and grid patterns. The 700 picture window can be configured to work seamlessly with any of our other series of windows and matching trim styles. Fabricated for todays generation.

#### NFRC Thermal Performance Data\*

GLAZING	U-VALUE	SHGC	VLT
DOE – R5 – Triple	0.21	0.22	0.38
Low E w/ Argon	0.26	0.28	0.51
High Perf. Low E	0.30	0.29	0.51
Clear	0.45	0.61	0.63

\*contact us to see thermal data with grids.

#### KAS-KEL WINDOWS WILL OFFER YOU A LIFETIME OF WORRY-FREE OPERATION, BACKED BY ONE OF THE BEST WARRANTIES IN THE INDUSTRY.



	Features	STANDARD	OPTION
	High-grade PVC delivers exceptional strength and thermal performance. White or Beige Interior	<b>O</b>	
ALS	Thermal Fusion Welded Frame	<b>I</b>	
MATERIALS	3" Cambridge Flat Casing		<b>I</b>
MA	Integral Nail Fin and J-Channel	<b>O</b>	
	Primed Applied Solid Pine Extension Jambs 4-9/16, 6-9/16 and Custom		0
TION	3" Cambridge Flat Casing		<b></b>
IRUC	Integral Nail Fin and J-Channel	<b></b>	
CONSTRUCTION	Primed Solid Pine Applied Extension Jambs 4-9/16", 6-9/16" and Custom		0
PERF.	DP 50 Rating	<b>I</b>	
	Energy Star III	<b>I</b>	
	Energy Star U-4		<b></b>
DNI	DOE R5 Triple Glass Package		<b>I</b>
GLAZING	Clear insulated glass		<b>I</b>
	Duralite flexible, warm-edge spacers	<b>I</b>	
	Impact Resistance, Tints, Heat Reflection and other options available		0
LLS	3/4" Contoured Grill Between the Glass		<b>I</b>
GRILLS	3/4" Contoured SDL with spacer bar		<b>I</b>





# **Architectural freedom** doesn't mean sacrificing efficiency

Kas-Kel Specialty Shapes allow for unusual and uniquely shaped windows to function with the same energy efficiency and functional integrity as our other time-tested vinyl windows.

For building or remodeling, these vinyl windows open a new world of possibilities.

### **Shape Options**

- Gothic/Half-Gothic
- Circle Top
- Eyebrow
- Oval/Half-Oval
- Full Circle

- Ellipse
  - Transom
  - Quarter Arch

  - Custom Shapes

**KAS-KEL WINDOWS WILL OFFER YOU A LIFETIME OF WORRY-FREE OPERATION, BACKED BY ONE OF THE BEST** WARRANTIES IN THE INDUSTRY.





- Operating Octagon



# Simulated Divided Light Grill



#### 3/4 Contoured SDL with spacer bar

 Our simulated divided light grill incorporates a space giving the look of true divided light

### Grill Between the Glass




- 3/4" Contoured Grill Between the Glass
- Our grill between the glass incorporates a deluxe shadow bar giving the look and feel of divided panes.







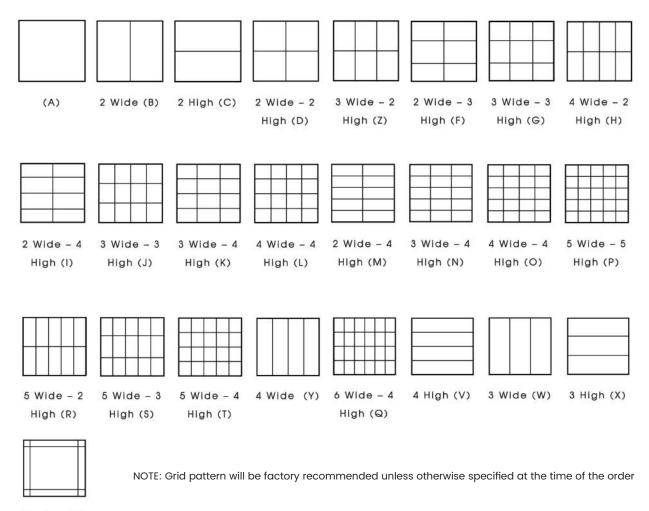

Border (F)







- Limited Lifetime Warranty
- → Over Seven Decades of Manufacturing Experience
- Electronic Ordering System
- → Field Service Team
- → Architectural Support
- → Marketing Services
- → Extensive Delivery Fleet
- → Energy Star Labeled
- → NFRC Certified
- → AAMA Certified Extrusions



### A Cleaner. Greener World

Kas-Kel Windows can reduce home energy use by 30 to 40 percent, and reduce CO2 output by 1,600 pounds per year. \* No window on Earth is better for the planet.



### Designed for Living

Kas-Kel Windows come in a wide range of styles to complement almost any architecture. They're low maintenance, high-performance, easy to clean, and a natural fit with any living room or lifestyle.



### Built for Life

High-grade hardware and high-impact components have earned MasterView Windows high marks for longevity. All Kas-Kel Windows are backed by the strongest warranty in the industry.

# Standard Exterior Colors











TERRASTONE

**FIELDSTONE** 

BRONZE

AUTUMN RED

HUNTER GREEN

Have a color in mind? We can custom match it! \*All representations of colors are mechanically reproduced and may vary from the actual product. Terms and conditions apply





